


Technical Specifications

MOM-8A

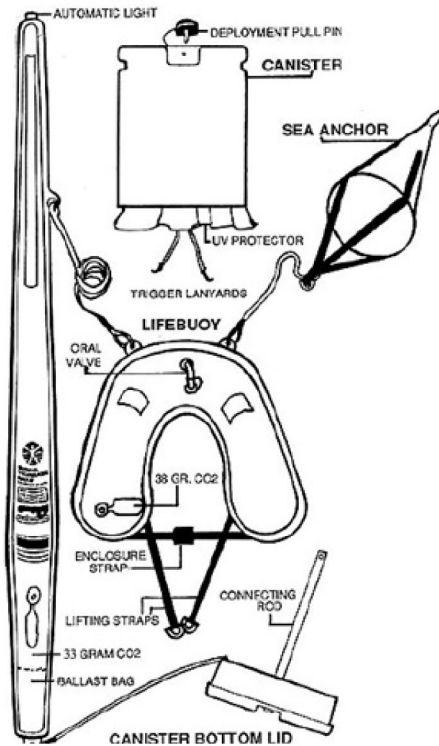

Avalon Rafts Sales & Service Inc.
218 Marine Ave.
Wilmington, California 90744
Los Angeles / Long Beach Ports
(310) 549-9665 24 hr
daraftman@aol.com
www.avalonrafts.com

Specifications

Certifications: ISAF Offshore Racing Special Regulation 4.22.1 for Man Overboard Lifebuoys
Pacific International Yachting Organization Special Regulations as Life Saving Equipment in Section 5.6

Canister:
Dimensions: 14.5"H x 11"L x 4.25"W
Weight: 22 lbs. packed
Material: Molded Polyethylene
Case Color: White
Rail-mounting hardware: Clamps (7/8", 1", 1 1/8", 1 1/4" sizes) + all necessary stainless nuts, bolts and fastpins
Optional Rail Extensions: Part no. 84002 (necessary on boats with rails with more than 11" of separation, the extension rails allow for up to 18" of separation between two parallel rails)

Horseshoe Inflation Device:
Material: Urethane-coated 420 denier Nylon
Buoyancy: 40 lbs.
Inflated Color: High Visibility Yellow
Inflation: 33g - CO2 cylinder
Lifting Straps: 1" wide nylon webbing with 2 S.S. D-rings.
Tethers: 3/8" Floating line
Sea Anchor: 16" diameter

Pylon:
Waterline Height: 6 ft.
Material: 200D yellow urethane-coated nylon
Color: Yellow
Reflective Panels: 72 sq. inches
Ballast: 8 lbs.
Auto Light: 8 hr. flashing

Copyright Switlik, Inc.